


SWT4X 防水熱縮端子管 Water Resistant Heat Shrink Tube

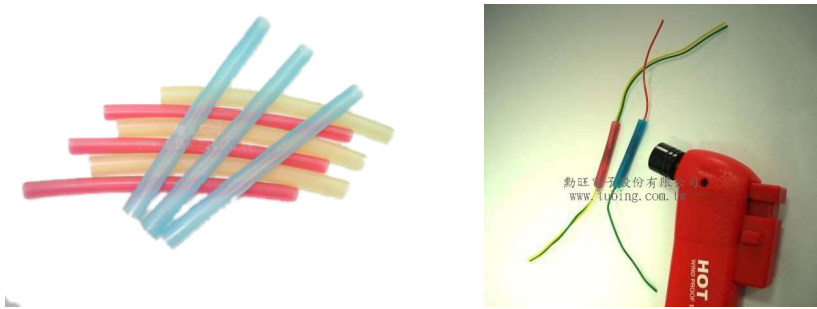

防水熱縮端子管 Product Introduction :

採用優質的交聯聚烯烴材料，內層採用優質熱熔膠複合加工而成，作為熱縮端子外管使用，提供電線的密封、防水、絕緣作用，廣泛應用於電線連接的防水、防腐蝕、抗壓、耐磨等，安裝簡便。

Use high quality cross-link polyolefin material. The hot melt adhesive compound will be adhered to inner layer for the purpose of applying to the outer usage of heat shrink terminal tube. It not only provides the electric wire sealed, water resistant, and insulation, but also widely used to the electric wire connection of waterproof, corrosion resistant, compression resistant, and wear-resisting and so on. Easier to install.

特點(Feature) :

1. 防水絕緣材質 With waterproof and insulation material.
2. 強化拉力效果 Reinforced tensile strength

工作溫度範圍 Temperature Range :

1. 適用範圍 Operating Temperature : $-45^{\circ}\text{C} \sim 125^{\circ}\text{C}$
2. 完全收縮溫度 Shrink Temperature : 125°C

規格 Specification : $\Phi 4.5 \sim \Phi 6.5$.亦可訂製特殊規格.

The Available sizes from $\Phi 4.5$ to $\Phi 6.5$ mm, available to produce upon special requirement.

收縮工具：用烘箱和熱風槍加熱即可收縮

Heating Tools : Using oven or heating gun to let it shrink.


顏色 Standard colors : 紅(Red)、藍(Blue)、黃(Yellow)。

收縮比(Shrink ratio) : 4:1

SWT4X

防水熱縮端子管規格

Water Resistant Heat Shrink Tube Specification

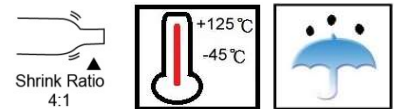

規格 Size (mm)	收縮前 最小內徑 As Supplied I.D.(mm)	收縮後 最大內徑 Max. I.D.	自由收縮後 After Recovery		標準包裝 米/捲 Standard Package M/Spool	標準包裝捲/箱 Standard Package CTN/Spool	顏色 Color
			平均總壁厚	平均膠層壁厚			
Φ4.5	4.5	≤ 1.0	1.30 ± 0.25	0.45 ± 0.15	100	6	紅 (Red)
Φ5.5	5.5	≤ 1.3	1.50 ± 0.30	0.45 ± 0.15	100	6	藍 (Blue)
Φ6.5	6.5	≤ 1.5	1.50 ± 0.30	0.45 ± 0.15	100	5	黃 (Yellow)
Φ8	8	≤ 1.7	1.50 ± 0.30	0.45 ± 0.15	100	5	黃 (Yellow)