

HP Series 壓接鉗 Crimper

HP781-GB

Weather Pack 壓接鉗
12/48/CTN/15.7/16.7/KGS/1.4' (插卡包裝)




Shape	1st hole	2nd hole	3rd hole	4th hole
O Crimp	O.D. Φ 3.45	O.D. Φ 4.25	T: 4.0m/m	
B Crimp	AWG 22	AWG 20-18		
	0.35 mm ²	0.5-0.8 mm ²	1.0-2.0 mm ²	3.0 mm ²

- ① Wire Crimp for AWG 22 (0.35 mm²) Terminals
- ② Wire Crimp for AWG 20-18 (0.5-0.8 mm²) Terminals
- ③ Wire Crimp for AWG 16-14 (1.0-2.0 mm²) Terminals
- ④ Wire Crimp for AWG 12 (3.0 mm²) Terminals
- A Metri-Pack 150 Seals O.D. Φ3.45
- B Metri-Pack 280 Seals & Weather Pack Seals O.D. Φ4.25
- 材質: AISI- 4140
加工方式: 精密脫蠟、磷酸鋅、熱處理
- 材質: SPCC
- 材質: PP+TPR (通過 RoHS認證)

HP791-YB

Superseal 1.5 壓接鉗
12/48/CTN/15.7/16.7/KGS/1.4' (插卡包裝)

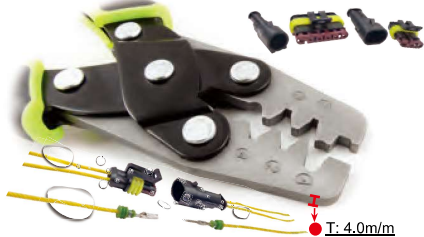

Shape	1st hole	2nd hole	3rd hole	4th hole
O Crimp	O.D. Φ 3.4	T: 4.0m/m		
B Crimp	AWG 22-20			
	0.35-0.5 mm ²	0.75 mm ²	1.0 mm ²	1.5 mm ²

- ① Wire Crimp for AWG 22-20 (0.35-0.5 mm²) Terminals
- ② Wire Crimp for AWG 18 (0.75 mm²) Terminals
- ③ Wire Crimp for AWG 17 (1.0 mm²) Terminals
- ④ Wire Crimp for AWG 16 (1.5 mm²) Terminals
- A Superseal 1.5 Seals O.D. Φ3.4
- 材質: AISI- 4140
加工方式: 精密脫蠟、磷酸鋅、熱處理
- SPCC
- 材質: PP+TPR (通過 RoHS認證)

HP801-RB

開口型端子壓接鉗
12/48/CTN/15.9/16.9/KGS/1.4' (插卡包裝)



Shape	1st hole	2nd hole	3rd hole	4th hole	5th hole	
B Crimp	AWG 26-24	AWG 24-22	AWG 20-16	AWG 14	AWG 12-10	
B Crimp	mm ²	0.14-0.25 mm ²	0.25-0.34 mm ²	0.5-1.5 mm ²	2.5 mm ²	4-6 mm ²
	Thickness	2 mm	2 mm	3 mm	3 mm	3.8 mm

- ②④-22 Wire Crimp for AWG 24-22 (0.25-0.34 mm²) Terminals
- ①④ Wire Crimp for AWG 14 (2.5 mm²) Terminals
- ②⑥-24 Wire Crimp for AWG 26-24 (0.14-0.25 mm²) Terminals
- ②①-16 Wire Crimp for AWG 20-16 (0.5-1.5 mm²) Terminals
- ①②-10 Wire Crimp for AWG 12-10 (4-6 mm²) Terminals
- 材質: AISI- 4140
加工方式: 精密脫蠟、磷酸鋅、熱處理
- 材質: SPCC
- 材質: PP+TPR (通過 RoHS認證)